

Improving Matsui’s Search Algorithm for the Best Differential/Linear Trails and its Applications for DES, DESL and GIFT

Fulei Ji^{1,2}, Wentao Zhang^{1,2}, and Tianyou Ding^{1,2}

¹ State Key Laboratory of Information Security, Institute of Information Engineering,
Chinese Academy of Sciences, Beijing, China
{jifulei, zhangwentao}@iie.ac.cn

² University of Chinese Academy of Sciences, Beijing, China

Abstract. Automatic search methods have been widely used for cryptanalysis of block ciphers, especially for the most classic cryptanalysis methods – differential and linear cryptanalysis. However, the automatic search methods, no matter based on MILP, SMT/SAT or CP techniques, can be inefficient when the search space is too large. In this paper, we improve Matsui’s branch-and-bound search algorithm which is known as the first generic algorithm for finding the best differential and linear trails by proposing three new methods. The three methods, named *Reconstructing DDT and LAT According to Weight*, *Executing Linear Layer Operations in Minimal Cost* and *Merging Two 4-bit S-boxes into One 8-bit S-box* respectively, can efficiently speed up the search process by reducing the search space as much as possible and reducing the cost of executing linear layer operations. We apply our improved algorithm to DESL and GIFT, which are still the hard instances for the automatic search methods. As a result, we find the best differential trails for DESL (up to 14-round) and GIFT-128 (up to 19-round). The best linear trails for DESL (up to 16-round), GIFT-128 (up to 10-round) and GIFT-64 (up to 15-round) are also found. To the best of our knowledge, these security bounds for DESL and GIFT under single-key scenario are given for the first time. Meanwhile, it is the longest exploitable (differential or linear) trails for DESL and GIFT. Furthermore, benefiting from the efficiency of the improved algorithm, we do experiments to demonstrate that the clustering effect of differential trails for 13-round DES and DESL are both weak.

Keywords: Matsui’s search algorithm · Differential trail · Linear trail · Clustering effect · DESL · GIFT-128 · GIFT-64 · DES.

1 Introduction

Differential cryptanalysis [5] and linear cryptanalysis [11] are two of the most fundamental methods for cryptanalysis of block ciphers. The first and the most important step of differential cryptanalysis (or linear cryptanalysis) is to find differential trails (or linear trails) with high probabilities (or large correlations). Therefore, how to find effective differential trails or linear trails has become a focus of cryptographer’s concern.

At EUROCRYPT’94 [12], Matsui proposed a branch-and-bound depth-first search algorithm, which presents an efficient automatic search algorithm to find the best differential trails and linear trails of DES³. However, Matsui’s method is not efficient enough for some other block ciphers such as DESL and FEAL. At CRYPTO’95 [14], Moriai et al. improved Matsui’s algorithm. They introduced the concept of search patterns to reduce unnecessary search candidates and found the best n -round linear trails of FEAL ($n \leq 32$). At FSE’97 [2], Aoki et al. further improved the search algorithm by proposing the pre-search strategy to discard unsatisfiable search patterns. They determined all the best differential trails of FEAL up to 32-round. In [4], Bao et al. proposed three strategies to speed up the search algorithm. They got good results on the best differential and linear trails of NOEKEON and SPONGENT. Bao’s three strategies can efficiently speed up the search process. However, it needs quite complex programming skills to implement their strategies.

³ Differential trails with highest probability or linear trails with largest correlation are called the best.

The idea of search patterns and the pre-search strategy are hard to implement when the weights⁴ of the differential or linear trails of the target cipher are not integers. For example, the weights of the difference propagations of S-boxes in DESL are not all integers. It is not convenient for DESL to perform the pre-search phase, since assigning decimal weights to every single round is difficult. In [2], Aoki et al. provided a version of pre-search algorithm that specially designed for decimal weights, but this algorithm is complicated to implement.

In recent years, Mixed-Integer Linear Programming (MILP) based method has been very popular in constructing automatic search algorithm in differential and linear cryptanalysis [13, 18, 16, 17, 15]. MILP-based method is convenient to programming. But when the block size or the round number of the target cipher is large, the size of the corresponding MILP model will be too large. There are some papers [20, 10] using MILP-based method to study the security of GIFT-128. But they can only get differential trails under some limitations and they cannot estimate the best difference propagation probabilities when the round number is large. In [15], Sun et al. applied MILP-based method to search differential trails of DESL, but they can only found a 10-round single-key differential trail of DESL with probability $2^{-52.25}$.

The weights of the difference propagations of the S-boxes in DESL and GIFT and the weights of the linear propagations in DESL are not all integers. As mentioned above, the original Matsui's method and the MILP-based method are both not efficient enough to search the best differential trails of DESL or GIFT-128, and it is really complicated to apply the idea of search patterns to accelerate the search process.

1.1 Our Contributions

In this paper, we apply three methods to speed up the original Matsui's algorithm. By these three speeding-up methods, we can efficiently prune unsatisfiable candidates and reduce the cost of executing linear layer operations:

- **Reconstructing DDT and LAT According to Weight** method is very helpful to reduce the complexity of the search process. We apply this method to prune unsatisfiable candidates by sorting the input and output differences according to their weights.
- **Executing Linear Layer Operations in Minimal Cost** method can be used to reduce the cost of P permutation and E expansion. By constructing linear layer table and executing look-up-table operations by SSE instructions, we can implement linear layer operations of each round with 2 XOR operations of 128-bit variables.
- **Merging Two 4-bit S-boxes into One 8-bit S-box** method is used to speed up the search process when the number of S-box is large. In the case of GIFT, by merging two consecutive 4×4 S-boxes into one 8×8 S-box, we can further reduce the cost of executing linear layer operations.

We use our improved search algorithm to search the best differential trails and linear trails of DES, DESL, GIFT-64 and GIFT-128. The results are helpful for estimating the security of DESL, GIFT-64 and GIFT-128 against differential and linear cryptanalysis.

For DES and DESL, our experimental results⁵ presented in Table 3 show that the first two methods bring an acceleration by a factor of 26-173. For GIFT-64 and GIFT-128, our experimental results presented in Table 4 show that the third method brings an acceleration by a factor of 2-4.

Results on DES and DESL:

- **For DES.** We find the best differential trails for up to 18-round⁶. The best difference probability of 18-round DES is $2^{-69.84}$. The results are summarized in Table 3. We find the best linear trails

⁴ We refer readers to [7] for the definition of *the weight of difference (or linear) propagation* and *the weight of differential (or linear) trail*.

⁵ All of the experiments and results in this paper are obtained and timed on a PC with Intel(R) Core(TM) i7-6700 3.40 GHz CPU, and 16 GB RAM, using single-thread program in C.

⁶ The round number of DES is 16.

of DES for up to 22-round. The best linear correlation of 22-round DES is $2^{-32.46}$. The results are summarized in Table 5.

We confirm the results on the best difference and linear probability of DES provided in [12, 14]. As we can see from Table 3, our new methods can efficiently speed up the search process.

- **For DESL.** We find the best differential trails for up to 14-round. The best difference probability of 14-round DESL is $2^{-68.78}$. The results are summarized in Table 3. We find the best linear trails of DESL for up to 16-round. The best linear correlation of 16-round DESL is $2^{-32.98}$. The results are summarized in Table 5.

To the best of our knowledge, we find the longest exploitable best differential and linear trails for DESL. In [16], the authors found a 10-round differential trail with probability $2^{-52.25}$, and there is no previous results on linear trails of DESL.

- **Demonstrating the Clustering Effect.** In [7], it has been mentioned that the differential and linear clustering effect of DES are both weak. But no experimental result was provided to demonstrate this conclusion.

In this paper, we conduct experiments applying the improved Matsui’s algorithm to search the clustering effect of differential trails for 13-round DES and DESL. Through the experiments in Sect.7, we find that the clustering effect of differential trails for 13-round DES and DESL are both weak.

Results on GIFT:

- **For GIFT-64.** We find the best differential trails for up to 14-round. The best difference probability of 14-round GIFT-64 is $2^{-68.000}$. The results are summarized in Table 4. We find the best linear trails of GIFT-64 for up to 15-round. The best linear correlation of 13-round GIFT-64 is $2^{34.00}$. The results are summarized in Table 6.

We find the longest exploitable best linear trails of GIFT-64 and we confirm the results on the best difference probability of GIFT-64 provided in [19].

- **For GIFT-128.** We find the best differential trails for up to 19-round. The best difference probability of 19-round GIFT-128 is $2^{-110.830}$. The results are summarized in Table 4.

We find the best linear trails of GIFT-128 for up to 10-round. The best linear correlation of 10-round GIFT-128 is $2^{-26.00}$. The results are summarized in Table 6.

We find the longest exploitable best differential and linear trails for GIFT-128. The results on the best difference probabilities and best linear correlations provided in this paper are the tightest security bounds of GIFT-128, which are found for the first time.

To illustrate the efficiency of our improved algorithm, we compare our results on the weight of the best differential trails with previous work in Table 1.

We find no result on the best linear trails of DESL or GIFT from previous work.

Since the weights of the linear propagations of S-boxes in GIFT are integers, Bao’s algorithm can be very suitable to search the best linear trails of GIFT. We compare our results on the weight of the best linear trails with the results of Bao’s algorithm in Table 2.

As shown in Table 2, for SPN block ciphers, when the weights are all integers, Bao’s algorithm is more efficient than our improved Matsui’s algorithm. But we need to state that: **The improved Matsui’s algorithm in this paper is easier to implement, and is more convenient to be applied in situations when the weights are not all integers.**

In addition, the improved Matsui’s algorithm can be used to search the best differential trails and best linear trails for other primitives, estimate the clustering effect and search the multiple differential distinguishers or multi-dimensional linear distinguishers.

1.2 Organization

The paper is organized as follows. Some preliminaries and symbolic conventions are presented in Sect.2. We introduce the four block ciphers: DES, DESL, GIFT-64 and GIFT-128 and Matsui’s search algorithm in Sect.3. In Sect.4, we propose our three speeding-up methods. Sect.5 and Sect.6 give the experimental results on the best differential and linear trails of DES, DESL, and GIFT,

Table 1. The weight of the best differential trails

DESL			GIFT-64			GIFT-128		
n	B_n (ours)	B_n ([15])	n	B_n (ours)	B_n ([19])	n	B_n (ours)	B_n ([10])
7	29.25		7	28.415	28.415	14	79.000	79*
8	37.59		8	38.000	38.000	15	85.415	86*
9	41.76		9	42.000	42.000	16	90.415	91*
10	49.79	52.52*	10	48.000	48.000	17	96.415	97*
11	52.71		11	52.000	52.000	18	103.415	103.415*
12	58.10		12	58.000	58.000	19	110.830	115*
13	60.78		13	62.000	62.000	20	121.415*	121.415*
14	68.78		14	68.000	68.000	21	126.415*	126.415*

¹ n : the round number. B_n : the weight of the best differential trails of n -round.

² * : the authors cannot guarantee that it is the best weight.

Table 2. The weight of the best linear trails

GIFT-64					GIFT-128				
n	B_n	t (ours)	pre-search workload	t ([4])	n	B_n	t (ours)	pre-search workload	t ([4])
9	20	41.47s	1	0.00s	5	7	0.05s	10	47.44s
10	25	0.85h	1	0.23h	6	10	1.77s	6	0.63s
11	29	8.83h	2	36.54h	7	13	19.38s	5	0.01s
12	31	0.73h	2	1.73s	8	17	0.50h	4	24.03s
13	34	3.15h	2	35.45h	9	22	44.09h	3	1.01h
14	37	5.12h	1	0.18s	10	26	20.9d	3	36.72h
15	40	4.59h	1	24.26s					

¹ n : the round number. B_n : the weight of the best linear trails of n -round.

² t : the search time.

providing justification for the efficiency of the three speeding-up methods. Sect.7 gives experimental results on estimating the clustering effect of differential trails for 13-round DES and DESL. Sect.8 is the conclusion and discussion.

2 Notations and Preliminaries

In [12], Matsui illustrated the duality between differential cryptanalysis and linear cryptanalysis. In this paper, **we take differential cryptanalysis as an example to explain our speeding-up methods**. The notations we use are similar to those in [12]. We use the sum of the weights of the round differential trails to characterize the best differential trails.

X_i, Y_i : the input and the output of the round function F_i

X_i^t, Y_i^t : the input and the output of the t -th S-box

$\Delta X_i, \Delta Y_i, \Delta X_i^t, \Delta Y_i^t$: the differential value of X_i, Y_i, X_i^t and Y_i^t

$\Gamma X_i, \Gamma Y_i$: the masking value of X_i and Y_i

K_i : the round key of the round function F_i

\oplus, \bullet : the bitwise XOR operation and AND operation

$P(x)$: P permutation on 0-1 string x

$E \circ P(x)$: composition of P permutation and E expansion on 0-1 string x

$parity(x) \stackrel{def}{=} x_0 \oplus x_1 \oplus \dots \oplus x_{n-1}$, in which $x = x_0 || x_1 || \dots || x_{n-1}$ is 0-1 string

In the case of **differential cryptanalysis**, we calculate the weights of the difference propagation probabilities:

$$\begin{aligned} (\Delta X_i, \Delta Y_i) &\stackrel{def}{=} -\log_2^{Prob\{F_i(X_i \oplus \Delta X_i, K_i) = F_i(X_i, K_i) \oplus \Delta Y_i\}} \\ [w_1, w_2, \dots, w_t] &\stackrel{def}{=} \sum_{i=1}^t w_i \\ B_n &\stackrel{def}{=} \min[(\Delta X_1, \Delta Y_1), (\Delta X_2, \Delta Y_2), \dots, (\Delta X_n, \Delta Y_n)] \end{aligned}$$

Note:

$\Delta X_i = \Delta X_{i-2} \oplus E \circ P(\Delta Y_{i-1}), 3 \leq i \leq n$, in the case of DES and DESL;

$\Delta X_i = P(\Delta Y_{i-1}), 2 \leq i \leq n$, in the case of GIFT.

In the case of **linear cryptanalysis**, we calculate the weights of the linear correlations:

$$\begin{aligned} (\Gamma X_i, \Gamma Y_i) &\stackrel{def}{=} -\log_2^{|\text{Prob}\{parity(X_i \bullet \Gamma X_i) = parity(F_i(X_i, K_i) \bullet \Gamma Y_i)\} - 1/2|} - 1 \\ [w_1, w_2, \dots, w_t] &\stackrel{def}{=} \sum_{i=1}^t w_i \\ B_n &\stackrel{def}{=} \min[(\Gamma X_1, \Gamma Y_1), (\Gamma X_2, \Gamma Y_2), \dots, (\Gamma X_n, \Gamma Y_n)] \end{aligned}$$

Note:

$\Gamma Y_i = \Gamma Y_{i-2} \oplus E \circ P(\Gamma X_{i-1}), 3 \leq i \leq n$, in the case of DES and DESL;

$\Gamma X_i = P(\Gamma Y_{i-1}), 2 \leq i \leq n$, in the case of GIFT.

3 Related Work

3.1 Feistel Block Cipher DES

The Data Encryption Standard [8] (DES) was developed at IBM and adopted by the U.S. National Bureau of Standards as the standard cryptosystem for sensitive but unclassified data. DES is a Feistel structure block cipher whose block size is 64 bits and key size is 56 bits. The round number of DES is 16. We illustrate the Feistel structure and the round function of DES in Fig.1. We refer readers to [8] for more details of DES.

- There are 8 different S-boxes in DES. We denote them as $S_i, 1 \leq i \leq 8$. For each S-box, it takes an input of 6 bits and gives an output of 4 bits.
- E is a bitwise expansion. It takes an input of 32 bits and gives an output of 48 bits. P is a bitwise permutation. It takes an input of 32 bits and gives an output of 32 bits.

3.2 Feistel Block Cipher DESL

DESL [9] is a lightweight variant of DES. DESL is almost the same as DES, except that it uses a single S-box instead of 8 different S-boxes as DES. The designers adapted the DES S-box design criteria and proposed the S-box used in DESL. Using the well designed S-box, DESL is stronger than DES in resisting differential and linear cryptanalysis. We refer readers to [9] for more details of DESL.

3.3 SPN Block Cipher GIFT

GIFT [3] is an SP-network lightweight block cipher. GIFT has two versions named in GIFT-64 and GIFT-128, whose block sizes are 64 and 128 bits respectively, and round numbers are 28 and 40 respectively. The key length of GIFT-64 and GIFT-128 are both 128 bits.

Recently, Banik et al. proposed a lightweight Authenticated Encryption (AE) scheme GIFT-COFB based on GIFT-128, which is one of the Round 1 Candidates of NIST Lightweight Crypto Standardization process [1].

There are 32 same 4×4 S-boxes in GIFT-128 and 16 same 4×4 S-boxes in GIFT-64. The round function of GIFT-128 is shown in Fig.2. We refer readers to [3] for more details of GIFT.

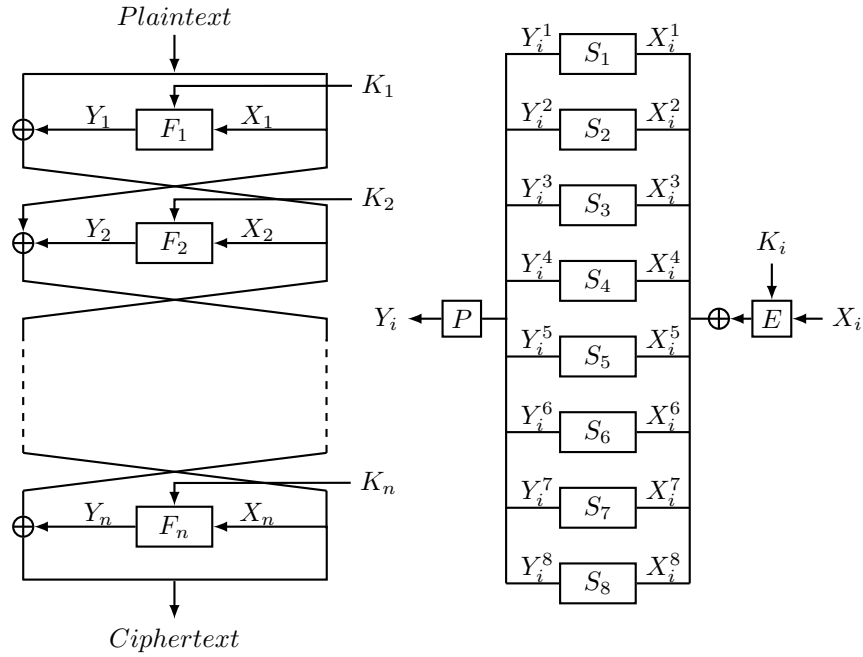


Fig. 1. Round function of DES

3.4 Matsui's Search Algorithm

Matsui's algorithm works by induction on the number of rounds and derives the best n -round weight B_n from the knowledge of all i -round best weight B_i ($1 \leq i \leq n - 1$). The program requires an initial value for B_n , which is represented as Bc_n . It works correctly for any Bc_i as long as $Bc_i \geq B_i$ ($1 \leq i \leq n - 1$).

The original search algorithm is recursive and targets DES. Alg.1 and Alg.2 show the details of Matsui's search algorithm targets Feistel cipher and SPN cipher respectively.

4 Our New Speeding-up Methods

Overall Strategy In order to speed up Matsui's search algorithm, we need to further study the inner details of Matsui's algorithm and the objective block ciphers: DES, DESL, GIFT.

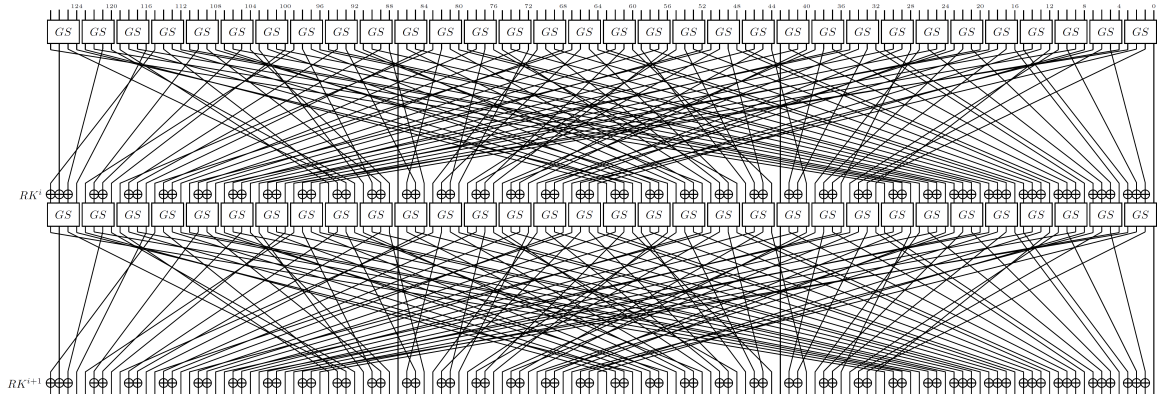


Fig. 2. Two rounds of GIFT-128 [1]

Algorithm 1: Matsui's Algorithm Targets Feistel Cipher**Input:** $n (\geq 4)$; $B_1, B_2, \dots, B_{n-1}; Bc_n$.**Output:** $B_n = Bc_n$; the best differential trails of round n .

```

1 Procedure Round-1
2   for each candidate of  $\Delta X_1$  do
3      $w_1 \leftarrow \min_{\Delta Y_1}(\Delta X_1, \Delta Y_1)$ ;
4     if  $[w_1, B_{n-1}] \leq Bc_n$  then
5       | call Round-2
6     end
7   end
8 end
9 Procedure Round-2
10  for each candidate of  $\Delta X_2$  and  $\Delta Y_2$  do
11     $w_2 \leftarrow (\Delta X_2, \Delta Y_2)$ ;
12    if  $[w_1, w_2, B_{n-2}] \leq Bc_n$  then
13      | call Round-3
14    end
15  end
16 end
17 Procedure Round- $i, 3 \leq i \leq n-1$ 
18  for each candidate of  $\Delta Y_i$  do
19     $\Delta X_i \leftarrow \Delta X_{i-2} \oplus E \circ P(\Delta Y_{i-1})$ ,
20     $w_i \leftarrow (\Delta X_i, \Delta Y_i)$ ;
21    if  $[w_1, \dots, w_i, B_{n-i}] \leq Bc_n$  then
22      | call Round- $(i+1)$ 
23    end
24 end
25 Procedure Round- $n$ 
26   $\Delta X_n \leftarrow \Delta X_{n-2} \oplus E \circ P(\Delta Y_{n-1})$ ,
27   $w_n \leftarrow \min_{\Delta Y_n}(\Delta X_n, \Delta Y_n)$ ;
28  if  $[w_1, w_2, \dots, w_n] \leq Bc_n$  then
29    |  $Bc_n = [w_1, w_2, \dots, w_n]$ 
30  end
31  return to the upper procedure;
32 end

```

Algorithm 2: Matsui's Algorithm Targets SPN Cipher**Input:** $n (\geq 3)$; $B_1, B_2, \dots, B_{n-1}; Bc_n$.**Output:** $B_n = Bc_n$; the best differential trails of round n .

```

1 Procedure Round-1
2   for each candidate of  $\Delta Y_1$  do
3      $w_1 \leftarrow \min_{\Delta X_1}(\Delta X_1, \Delta Y_1)$ ;
4     if  $[w_1, B_{n-1}] \leq Bc_n$  then
5       | call Round-2
6     end
7   end
8 end
9 Procedure Round- $i, 2 \leq i \leq n-1$ 
10   $\Delta X_i \leftarrow P(\Delta Y_{i-1})$ ;
11  for each candidate of  $\Delta Y_i$  do
12     $w_i \leftarrow (\Delta X_i, \Delta Y_i)$ ;
13    if  $[w_1, \dots, w_i, B_{n-i}] \leq Bc_n$  then
14      | call Round- $(i+1)$ 
15    end
16  end
17 end
18 Procedure Round- $n$ 
19   $\Delta X_n \leftarrow P(\Delta Y_{n-1})$ ;
20   $w_n \leftarrow \min_{\Delta Y_n}(\Delta X_n, \Delta Y_n)$ ;
21  if  $[w_1, w_2, \dots, w_n] \leq Bc_n$  then
22    |  $Bc_n = [w_1, w_2, \dots, w_n]$ 
23  end
24  return to the upper procedure;
25 end
26
27
28
29
30
31
32
33

```

Algorithm 3: Our Search Approach for DES and DESL

Input: $n (\geq 4)$; B_1, B_2, \dots, B_{n-1} ; Bc_n ; WeightTable[9].
Output: $B_n = Bc_n$; the best differential trails of n -round.

- 1 **Generate Tables**
- 2 DDTwX[SboxN][WeightN][InN];
- 3 DDTXoder[SboxN][WeightN][InN], DDTYoder[SboxN][WeightN][OutN];
- 4 DDTY[SboxN][InV][OutN], DDTYw[SboxN][InV][OutN];
- 5 Etable[SboxN][OutV][LocN];
- 5 **end**
- 6 **Procedure Round-1**
- 7 $w_1 \leftarrow 0, \Delta X_1 \leftarrow 0$;
- 8 **for** $t=1$ **to** 8 **do**
- 9 **for** $j = 8$ **to** 0 **do**
- 10 $w_1 \leftarrow w_1 + \text{WeightTable}[j]$;
- 11 **if** $[w_1, B_{n-1}] \geq Bc_n$ **then** break;
- 12 **else for each** $DDTwX[t][j][r]$ **do**
- 13 $\Delta X_1^t \leftarrow DDTwX[t][j][r]$, call Round-2
- 14 **end**
- 15 **end**
- 16 **end**
- 17 **end**
- 18 **Procedure Round-2**
- 19 $w_2 \leftarrow 0, \Delta X_2 \leftarrow 0, \Delta Y_2 \leftarrow 0$;
- 20 **for** $t=1$ **to** 8 **do**
- 21 **for** $j = 8$ **to** 0 **do**
- 22 $w_2 \leftarrow w_2 + \text{WeightTable}[j]$;
- 23 **if** $[w_1, w_2, B_{n-2}] \geq Bc_n$ **then** break;
- 24 **else for each** $DDTXoder[t][j][r]$ **do**
- 25 $\Delta X_2^t \leftarrow DDTXoder[t][j][r], \Delta Y_2^t \leftarrow DDTYoder[t][j][r]$;
- 26 call Round-3
- 27 **end**
- 28 **end**
- 29 **end**
- 30 **end**
- 31 **Procedure Round- $i, 3 \leq i \leq n-1$**
- 32 $\Delta X_i \leftarrow \Delta X_{i-2} \oplus E \circ P(\Delta Y_{i-1})$;
- 33 $w_i \leftarrow DDTYw[1][\Delta X_i^1][0] + \dots + DDTYw[8][\Delta X_i^8][0]$;
- 34 $\Delta Y_i^1 \leftarrow DDTY[1][\Delta X_i^1][0], \dots, \Delta Y_i^8 \leftarrow DDTY[8][\Delta X_i^8][0]$;
- 35 **for** $t=1$ **to** 8 **do**
- 36 $w_i \leftarrow w_i - DDTYw[t][\Delta X_i^t][0]$;
- 37 **for each** $DDTYw[t][\Delta X_i^t][r]$ **do**
- 38 $w_i \leftarrow w_i + DDTYw[t][\Delta X_i^t][r]$;
- 39 **if** $[w_1, w_2, \dots, w_i, B_{n-i}] \geq Bc_n$ **then** break;
- 40 **else** $\Delta Y_i^t \leftarrow DDTY[t][\Delta X_i^t][r]$, call Round- $(i+1)$
- 41 **end**
- 42 **end**
- 43 **end**
- 44 **Procedure Round- n**
- 45 $\Delta X_n \leftarrow \Delta X_{n-2} \oplus E \circ P(\Delta Y_{n-1}), w_n \leftarrow \min_{\Delta Y_n}(\Delta X_n, \Delta Y_n)$;
- 46 **if** $[w_1, w_2, \dots, w_n] \leq Bc_n$ **then** $Bc_n = [w_1, w_2, \dots, w_n]$;
- 47 return to the upper procedure;
- 48 **end**

We speed up the search process in the following two ways:

- 1 As mentioned in [14], the complexity of the search process for the n -round best trails is dominated by the number of candidates in Procedure Round-1 and Procedure Round-2. We apply the speeding-up method in Sect.4.1 to prune unsatisfiable candidates as soon as we can;
- 2 When we get a new candidate of ΔY_i , we need to calculate $E \circ P(\Delta Y_i)$ or $P(\Delta Y_i)$. We apply the speeding-up methods in Sect.4.2 and Sect.4.3 to reduce the cost of executing linear layer operations.

4.1 Reconstructing DDT and LAT According to Weight

We take Alg.1 and DES as an example to illustrate how to construct new look-up tables. Alg.1 is a branch-and-bound algorithm, pruning unsatisfiable candidates by the inequalities set in each round. In [12], Matsui suggested that we should try ΔX_i^j and ΔY_i^j in order of the magnitude of $(\Delta X_i^j, \Delta Y_i^j)$. In [4], Bao et al. also searched ΔX_i^j and ΔY_i^j in order of their weights. Inspired by their ideas, we reconstruct the difference distribution table in Procedure Round-1, Round-2 and Round- i ($3 \leq i \leq n - 1$) respectively, ranking input-output difference pairs in order of their weights. With the help of the new look-up tables, we can efficiently search the input-output difference pairs with large weights and throw away input-output difference pairs with small weights as soon as possible. By doing this, we can significantly accelerate the search process.

There are 9 different weights of the difference propagations for each S-box in DES: 5.00, 4.00, 3.42, 3.00, 2.68, 2.42, 2.20, 2.00, 0.00. We use a table to denote this weight set. The elements are sorted in a descending order:

$$\mathbf{WeightTable}[9] = \{5.00, 4.00, 3.42, 3.00, 2.68, 2.42, 2.20, 2.00, 0.00\}$$

In Procedure Round-1 Since the output difference has no effect on the subsequent search process, we only care about the input difference and their weights. We construct one table to classify the input differences of each S-box according to the corresponding weights:

$$\mathbf{DDTwX}[\mathbf{SboxN}][\mathbf{WeightN}][\mathbf{InN}]$$

- SboxN represents the index of the S-box. It ranges from 1 to 8. WeightN represents the index of the weights. It ranges from 0 to 8. InN represents the index of the input difference. It ranges from 0 to 63.
- $\mathbf{DDTwX}[t][j][r]$ represents the r -th input difference of the t -th S-box with a weight $\mathbf{WeightTable}[j]$.

In Procedure Round-2 We care about the input-output difference pairs and their weights. We construct two tables:

$$\mathbf{DDTXorder}[\mathbf{SboxN}][\mathbf{WeightN}][\mathbf{InN}]$$

$$\mathbf{DDTYorder}[\mathbf{SboxN}][\mathbf{WeightN}][\mathbf{OutN}]$$

- InN represents the index of the input difference. OutN represents the index of the output difference. The range of these two values depends on the choice of the S-box. For DES, InN and OutN range from 0 to 267 respectively.
- $\mathbf{DDTXorder}[t][j][r]$ represents the r -th input difference of the t -th S-box with a weight $\mathbf{WeightTable}[j]$. Its corresponding output difference is $\mathbf{DDTYorder}[t][j][r]$.

In Procedure Round- i , $3 \leq i \leq n - 1$. Since the input difference is fixed, we care about the corresponding output differences and their weights. We construct two tables:

$$\mathbf{DDTY}[\mathbf{SboxN}][\mathbf{InV}][\mathbf{OutN}]$$

$$\mathbf{DDTYw}[\mathbf{SboxN}][\mathbf{InV}][\mathbf{OutN}]$$

- InV represents the value of the input difference. It ranges from 0 to 63. OutN represents the index of the output difference. It ranges from 0 to 15.

- $\text{DDTY}[i][j][r]$ represents the r -th output difference of the i -th S-box whose input difference is j . Its corresponding weight is $\text{DDTYw}[i][j][r]$.
- We rank the output differences of each input difference in order of their weights: if $r_1 < r_2$, then $\text{DDTYw}[i][j][r_1] \leq \text{DDTYw}[i][j][r_2]$.

The accelerated Procedure Round- i , $1 \leq i \leq n - 1$ using new look-up tables is shown in Alg.3. We omit the constraints between the the input differences of adjacent S-boxes in Alg.3.

In Procedure Round-1. For the t -th S-box, we traverse the weights of its difference propagations from $\text{WeightTable}[8]$ to $\text{WeightTable}[0]$. If $\text{WeightTable}[j]$ does not satisfy the inequality:

$$[w_1, B_{n-1}] \leq Bc_n \quad (1)$$

then we can prune the input differences with weights range from $\text{WeightTable}[j]$ to $\text{WeightTable}[0]$.

In Procedure Round-2. For the t -th S-box, we traverse its weights from $\text{WeightTable}[8]$ to $\text{WeightTable}[0]$. For each satisfiable $\text{WeightTable}[j]$, we traverse the corresponding input differences and output differences.

In Procedure Round- i , $3 \leq i \leq n - 1$. For the t -th S-box, its input difference is ΔX_i^t . We traverse its weights in the order: $\text{DDTYw}[t][\Delta X_i^t][0]$, $\text{DDTYw}[t][\Delta X_i^t][1]$, \dots and the corresponding output differences. If $\text{DDTYw}[t][\Delta X_i^t][j]$ does not satisfy the inequality:

$$[w_1, w_2, \dots, w_i, B_{n-i}] \geq Bc_n \quad (2)$$

then we don't need to traverse $\text{DDTYw}[t][\Delta X_i^t][m]$ ($m \geq j$).

4.2 Executing Linear Layer Operations in Minimal Cost

We take Alg.3 and DES as an example. The implementation of P and E operations is one of the most costly parts of the search process. Since it is efficient to execute linear layer operations by looking up tables, we construct one table to execute the P permutation and the E expansion at once. **Taking advantage of the new table, we can easily use SSE instructions to implement linear layer operations.**

In [4], Bao et al. proposed a speeding-up method named *Trailing in Minimal Changes Order Strategy*. They constructed one table to implement nonlinear layer and linear layer operations at once. Inspired by this method, we build one linear-layer table according to the output differences of each S-box. The new table is:

EPTable[SboxN][OutV][LocN]

- In order to use SSE instructions, we split the output of $E \circ P(\cdot)$ into eight 4-bit values. SboxN represents the index of the S-box. It ranges from 1 to 8. OutV represents the value of the output difference. It ranges from 0 to 15. LocN represents the index of the output after executing P and E operations. It ranges from 0 to 7.
- $\text{EPTable}[t][j][r]$ represents that: for the t -th S-box whose output difference is j , after executing the P permutation and the E expansion, the r -th value of the output is $\text{EPTable}[t][j][r]$.

With the help of $\text{EPTable}[SboxN][OutV][LocN]$ table, **we can reduce the cost of executing P and E operations from 7 XOR operations to 2 XOR operations.**

- In general, we look up the $\text{EPTable}[SboxN][OutV][LocN]$ table to determine the value of $E \circ P(\Delta Y_i)$ when we generate a new value of ΔY_i . We use the SSE instructions to execute the look-up-table operations. To generate the value of $E \circ P(\Delta Y_i)$, we need to perform **7 XOR operations of 128-bit variables**.
- We find that when we traverse the output difference of the r -th S-box of the i -th round, the only difference between the new output difference value $\Delta Y_{i_{new}}$ and the old output difference value $\Delta Y_{i_{old}}$ is ΔY_i^r . So we can calculate $E \circ P(\Delta Y_{i_{new}})$ using $E \circ P(\Delta Y_{i_{old}})$ and $\text{EPTable}[SboxN][OutV][LocN]$. Then we only need to perform **2 XOR operations of 128-bit variables** to generate the value of $E \circ P(\Delta Y_{i_{new}})$.

The speeding-up methods presented in Sect.4.1 and Sect.4.2 are also applied in the search process of GIFT. The improved search approach is shown in Alg.4⁷.

Algorithm 4: Our Search Approach for GIFT

Input: $n (\geq 3)$; $B_1, B_2, \dots, B_{n-1}; Bc_n$; WeightTable[10]; $NofSbox$.

Output: $B_n = Bc_n$; the best differential trails of n -round.

```

1 Generate Tables
2   DDTwY[SboxN][WeightN][InN];
3   DDTY[SboxN][InV][OutN], DDTYw[SboxN][InV][OutN];
4   Ptable[SboxN][OutV][LocN];
5 end
6 Procedure Round-1
7    $w_1 \leftarrow 0, \Delta Y_1 \leftarrow 0$ ;
8   for  $t=1$  to  $NofSbox$  do
9     for  $j = 9$  to  $0$  do
10       $w_1 \leftarrow w_1 + WeightTable[j]$ ;
11      if  $[w_1, B_{n-1}] \geq Bc_n$  then break;
12      else for each  $DDTwY[t][j][r]$  do
13         $\Delta Y_1^t \leftarrow DDTwY[t][j][r]$ , call Round-2
14      end
15    end
16  end
17 end
18 Procedure Round- $i$ ,  $2 \leq i \leq n-1$ 
19    $\Delta X_i \leftarrow P(\Delta Y_{i-1})$ ;
20    $w_i \leftarrow DDTYw[1][\Delta X_i^1][0] + \dots + DDTYw[NofSbox][\Delta X_i^{NofSbox}][0]$ ;
21    $\Delta Y_i^1 \leftarrow DDTY[1][\Delta X_i^1][0], \dots, \Delta Y_i^{NofSbox} \leftarrow DDTY[NofSbox][\Delta X_i^{NofSbox}][0]$ ;
22   for  $t=1$  to  $NofSbox$  do
23      $w_i \leftarrow w_i - DDTYw[t][\Delta X_i^t][0]$ ;
24     for each  $DDTYw[t][\Delta X_i^t][r]$  do
25        $w_i \leftarrow w_i + DDTYw[t][\Delta X_i^t][r]$ ;
26       if  $[w_1, \dots, w_i, B_{n-i}] \geq Bc_n$  then break;
27       else  $\Delta Y_i^t \leftarrow DDTY[t][\Delta X_i^t][r]$ , call Round- $(i+1)$ 
28     end
29   end
30 end
31 Procedure Round- $n$ 
32    $\Delta X_n \leftarrow P(\Delta Y_{n-1}), w_n \leftarrow \min_{\Delta Y_n}(\Delta X_n, \Delta Y_n)$ ;
33   if  $[w_1, w_2, \dots, w_n] \leq Bc_n$  then  $Bc_n = [w_1, w_2, \dots, w_n]$ ;
34   return to the upper procedure;
35 end

```

Compared with Alg.3, there are two new tables in Alg.4:

DDTwY[SboxN][WeightN][OutN]

Ptable[SboxN][OutV][LocN]

- $DDTwY[t][j][r]$ represents the r -th output difference of the t -th S-box with a weight $WeightTable[j]$.
- We split the output of $P(\cdot)$ into sixteen 8-bit values. $LocN$ represents the index of the output after executing the P permutation. It ranges from 0 to 15.

⁷ $NofSbox$ represents the number of the S-boxes. For GIFT-128, $NofSbox = 16$; for GIFT-64, $NofSbox = 8$.

- $\text{Ptable}[t][j][r]$ represents that: for the t -th S-box whose output difference is j , after executing the P permutation, the r -th value of the output is $\text{Ptable}[t][j][r]$.

4.3 Merging Two 4-bit S-boxes into One 8-bit S-box

We take **GIFT-128** as an example. There are 32 4×4 S-boxes in GIFT-128. To speed up the search process, we merge the two consecutive 4×4 S-boxes into one 8×8 S-box. The original 32 S-boxes of GIFT-128 is as follows:

$$S_1, S_2, S_3, \dots, S_{31}, S_{32} \quad (3)$$

We mark the original version of GIFT-128 as the **old-version GIFT-128**. There are 16 8×8 S-boxes in the **new-version GIFT-128**:

$$SS_1, SS_2, SS_3, \dots, SS_{15}, SS_{16} \quad (4)$$

The relationship between S_1, S_2, \dots, S_{32} and $SS_1, SS_2, \dots, SS_{16}$ is that, if we have:

$$Y^{2^{i-1}} = S_{2^{i-1}}[X^{2^{i-1}}] \quad (5)$$

$$Y^{2^i} = S_{2^i}[X^{2^i}], \quad (6)$$

then we have:

$$Y^{2^{i-1}} || Y^{2^i} = SS_i[X^{2^{i-1}} || X^{2^i}] \quad (7)$$

in which $1 \leq i \leq 16$.

Using this speeding-up method, we can efficiently speed up the search process of GIFT-128:

- 1 It is very convenient to store sixteen 8-bit value with a 128-bit variable, so we can easily use SSE instructions just as in Alg.3;
- 2 The cost of executing the P permutation can be reduced. *For example*, if the output difference of SS_r changes from $0x12$ to $0x35$, then we only need 2 XOR operations ($0x12 \rightarrow 0x35$) of 128-bit variables to generate $P(\Delta Y)$. While in the search of the old-version GIFT-128, we need 4 XOR operations ($0x1 \rightarrow 0x3, 0x2 \rightarrow 0x5$ respectively) of 128-bit variables.

5 Experimental Results on Best Differential Trails

5.1 DES and DESL

We have searched the best differential trails and the weights of the best differential trails of DES and DESL with Alg.3. Table 3 summarizes our experimental results. Table 14 in Appendix A shows one of the best 12-round differential trails of DESL.

5.2 GIFT

We have searched the best differential trails and the weights of the best differential trails of GIFT-64 and GIFT-128 with Alg.4. Table 4 summarizes our experimental results. Table 15 in Appendix A shows one of the best 19-round differential trails of GIFT-128. Table 16 in Appendix A shows one of the best 14-round differential trails of GIFT-64.

6 Experimental Results on Best Linear Trails

6.1 DES and DESL

We have searched the best linear trails and the weights of the best linear trails of DES and DESL with the variant of Alg.3⁸. Table 5 summarizes our experimental results. Table 14 in Appendix A shows one of the best 16-round linear trails of DESL.

⁸ We refer readers to [12] to get the transformation method.

Table 3. The weights of the best differential trails of DES and DESL

n	DES					DESL			
	B_{c_n}	B_n	t_0 (s)	t_1 (s)	t_2 (s)	B_{c_n}	B_n	t_1	t_2
4	10	9.61	4.83	0.23	0.04	10	9.02	0.14s	0.06s
5	14	13.22	57.34	2.91	0.88	15	14.05	12.44s	4.80s
6	20	19.96	303.26	20.68	2.63	23	22.19	0.67h	569.55s
7	24	23.61	338.31	20.61	1.96	30	29.25	11.00h	2.96h
8	31	30.48	436.82	45.00	6.31	38	37.59	15.35h	6.66h
9	32	31.48	3.66	0.16	0.03	42	41.76	812.45s	293.78s
10	39	38.35	7.80	0.90	0.30	50	49.79	2.99h	1.55h
11	40	39.35	3.72	0.16	0.03	53	52.71	326.29s	96.70s
12	47	46.22	7.61	0.90	0.16	59	58.10	148.37s	72.81s
13	48	47.22	3.75	0.15	0.04	61	60.78	0.73s	0.30s
14	55	54.10	7.61	0.90	0.16	69	68.78	40.49s	11.15s
15	56	55.10	3.81	0.14	0.04				
16	62	61.97	7.55	0.88	0.12				
17	63	62.97	3.83	0.16	0.03				
18	70	69.84	7.65	0.91	0.15				

¹ n : the round number. B_n : the weight of the best differential trails of n -round. B_{c_n} : the initial value of B_n .

² t_0 : the search time of the original Matsui's method (Alg.1).

³ t_1 : the search time of applying the speeding-up method in Sect.4.1.

⁴ t_2 : the search time of applying the speeding-up methods in Sect.4.1 and Sect.4.2.

6.2 GIFT

We have searched the best linear trails and the weights of the best linear trails of GIFT-64 and GIFT-128 with the variant of Alg.4. Table 6 summarizes our experimental results. Table 15 in Appendix A shows one of the best 10-round linear trails of GIFT-128. Table 16 in Appendix A shows one of the best 13-round linear trails of GIFT-64.

7 Experimental Results on Estimating the Differential Clustering Effect of DES and DESL

Let PD denote the plaintext difference and CD denote the ciphertext difference. Let Bu_n denote the upper bound of B_n . In all the experiments of Sect.7, we try to find all the differential trails with weights B_n satisfying $B_n \leq Bu_n$.

7.1 DES

In [6], Biham et al. proposed a key recovery attack on 16-round DES using a 13-round differential trail with weight 47.22. In Sect.7.1, we estimate the clustering effect of differential trails for 13-round DES based on Alg.3. We focus on PD , CD and the weights of the differential trails.

Experiment 1 The 13-round differential trail used in [6] is as follows⁹:

$$PD = 19600000\ 00000000, \quad CD = 19600000\ 00000000 \quad (8)$$

First of all, we try to find different differential trails satisfying equation (12). Table 7 summarizes the experimental results.

We set $Bu_{13} = 65$, but there is still only one differential trail satisfying equation (8). Therefore, **the clustering effect of differential trail satisfying equation (8) is weak.**

⁹ All the plaintext differences and ciphertext differences given below are in hexadecimal form.

Table 4. the weights of the best differential trails of GIFT

n	GIFT-64			GIFT-128			
	Bc_n	B_n	t_2 (s)	Bc_n	B_n	t_1	t_2
3	7.0	7.000	0.01	7.0	7.000	0.02s	0.00s
4	11.5	11.415	0.00	11.5	11.415	0.05s	0.02s
5	17.0	17.000	0.02	17.0	17.000	0.60s	0.21s
6	22.5	22.415	0.09	22.5	22.415	1.65s	0.62s
7	28.5	28.415	0.64	28.5	28.415	9.93s	3.74s
8	39.0	38.000	66.01	39.0	39.000	7.58h	2.23h
9	43.0	42.000	26.75	45.5	45.415	1.88h	0.66h
10	49.0	48.000	71.85	49.5	49.415	0.39h	0.13h
11	53.0	52.000	23.22	54.5	54.415	0.50h	0.17h
12	59.0	58.000	31.62	60.5	60.415	1.11h	0.38h
13	63.0	62.000	5.15	68.0	67.830	6.67h	2.24h
14	69.0	68.000	6.99	79.0	79.000	-	257.13h
15				86.0	85.415	435.72h	144.80h
16				90.5	90.415	24.42h	8.39h
17				97.0	96.415	66.74h	21.93h
18				103.5	103.415	-	102.48h
19				111.0	110.830	-	363.90h
20				121.5	≤ 121.415	-	-
21				126.5	≤ 126.415	-	-

¹ t_1 : the search time of applying the speeding-up methods in Sect.4.1 and Sect.4.2.

² t_2 : the search time of applying the speeding-up methods in Sect.4.1, Sect.4.2 and Sect.4.3.

³ - : the values that we have not got.

Table 5. The weights of the best linear trails of DES and DESL

n	DES			DESL		
	Bc_n	B_n	t (s)	Bc_n	B_n	t
4	4	3.03	0.003	5	4.02	0.01s
5	5	4.71	0.010	6	5.22	0.00s
6	8	7.03	0.043	10	9.05	6.37s
7	9	8.03	0.020	13	12.57	0.39h
8	10	9.71	0.004	16	15.53	6.66h
9	13	12.07	0.083	17	16.49	3.22s
10	14	13.39	0.009	20	19.32	10.30s
11	15	14.07	0.003	22	21.32	10.92s
12	16	15.75	0.002	25	24.15	37.74s
13	18	17.42	0.019	25	24.74	0.01s
14	20	19.75	0.030	28	27.57	0.29s
15	21	20.75	0.006	30	29.57	0.54s
16	23	22.42	0.008	33	32.98	72.55s
17	25	24.78	0.045			
18	27	26.10	0.011			
19	27	26.78	0.001			
20	29	28.46	0.003			
21	31	30.14	0.037			
22	33	32.46	0.038			

¹ n : the round number. B_n : the weight of the best linear trails of n -round. Bc_n : the initial value of B_n .

² t : the search time of applying the speeding-up methods in Sect.4.1 and Sect.4.2.

Table 6. The weights of the best linear trails of GIFT

n	GIFT-64			GIFT-128		
	Bc_n	B_n	$t1$	Bc_n	B_n	$t1$
3	3.00	3.00	0.00s	3.00	3.00	0.00s
4	5.00	5.00	0.00s	5.00	5.00	0.01s
5	7.00	7.00	0.00s	7.00	7.00	0.05s
6	10.00	10.00	0.01s	10.00	10.00	1.77s
7	13.00	13.00	0.11s	13.00	13.00	19.38s
8	16.00	16.00	1.48s	17.00	17.00	0.50h
9	20.00	20.00	41.47s	22.00	22.00	44.09h
10	25.00	25.00	0.85h	26.00	26.00	20.9d
11	29.00	29.00	8.83h			
12	31.00	31.00	0.73h			
13	34.00	34.00	3.15h			
14	37.00	37.00	5.12h			
15	40.00	40.00	4.59h			

¹ $t1$: the search time of applying the speeding-up methods in Sect.4.1, Sect.4.2 and Sect.4.3.

Table 7. Results of Experiment 1

parameters			results	
Bu_{13}	PD	CD	number of trails	search time
65	19600000 00000000	19600000 00000000	1	2.81h

Experiment 2 We try to find other 13-round differential trails with small weight and strong clustering effect, and we hope to find 13-round differential hulls with weight smaller than 47.22.

We increase the value of Bu_{13} and count the number of differential trails with weight satisfying $B_{13} \leq Bu_{13}$. Table 8 summarizes the experimental results.

Table 8. Results of Experiment 2

parameters	results		
Bu_{13}	number of trails	number of trails with the same plaintext and ciphertext difference	search time
51	55	0	2.17m
52	203	0	11.69m
53	531	0	81.17m

As we can see from Table 8, setting $Bu_{13} = 53$, we get 531 differential trails, but there is still no two trails sharing the same PD and CD .

Experiment 3 In Experiment 2, setting $Bu_{13} = 51$, we get 55 differential trails. Among the 55 trails, there are four trails with weights smaller than 50. The PD and CD of these four trails are shown in Table 9.

Similar to Experiment 1, we explore the clustering effect of the differential trail No.2 to No.4. Table 10 summarizes the experimental results. Setting $Bu_{13} = 56$, we still cannot find new differential trails sharing the same PD and CD with differential trail No.2, No.3 or No.4 in Table 9.

The experimental results of Experiment 1 to 3 show that **the clustering effect of differential trails for 13-round DES is weak.**

Table 9. Four differential trails with the smallest weights of 13-round DES

number	PD	CD	weight
1	19600000 00000000	19600000 00000000	47.22
2	1b600000 00000000	1b600000 00000000	47.22
3	00196000 00000000	00196000 00000000	48.00
4	000003d4 00000000	000003d4 00000000	48.56

Table 10. Results of Experiment 3

parameters			results	
Bu_{13}	PD	CD	number of trails	search time
56	1b600000 00000000	1b600000 00000000	1	8.53s
56	00196000 00000000	00196000 00000000	1	10.03s
56	000003d4 00000000	000003d4 00000000	1	7.28s

7.2 DESL

As we can see from Table 3, the weight of 12-round best differential trails of DESL is 58.10, which is larger than the key size 56. In order to construct 16-round key recovery attack on DESL, we estimate the differential clustering effect of 13-round DESL.

Experiment 4 We try to find 13-round differential trails with small propagation weight and strong clustering effect. Hopefully, we want to find 13-round differential hulls with weight smaller than 56.

We increase the value of Bu_{13} and count the number of differential trails with weight satisfying $B_{13} \leq Bu_{13}$. Table 11 summarizes the experimental results.

Table 11. Results of Experiment 4

parameters		results	
Bu_{13}	number of trails	number of trails with the same plaintext and ciphertext difference	search time
62	52	0	16.78s
63	214	0	73.40s
65	1137	0	1277.17s

Through Experiment 4, we cannot find two trails having the same PD and CD . We get two trails with weight 60.78 and 16 trails with weight 61.37¹⁰. The PD and CD of these trails are shown in Table 12¹¹.

Experiment 5 We explore the clustering effect of differential trails in Table 12. Table 13 summarizes the experimental results.

We set $Bu_{13} = 70$, and set the value of PD and CD same as the No.1 trail in Table 12:

$$PD = 027c0400\ 00000040, \quad CD = 027a0400\ 00000040 \quad (9)$$

We find three trails satisfying equation (9). The weight of these three trails are: 65.17, 67.56 and 60.78.

As we can see from Table 13, we get one differential hull with weight 60.70 and eight differential hulls with weight 61.29. These differential hulls are useless for 16-round key recovery attack of DESL.

The experimental results of Experiment 4 and 5 show that **the clustering effect of differential trails for 13-round DESL is weak.**

¹⁰ 61.37 is the second smallest weight of 13-round DESL differential trails.

¹¹ Considering the symmetry of encryption and decryption process of DESL, there are actually one trail with weight 60.78 and 8 trails with weight 61.37.

Table 12. Nine differential trails with the smallest weights of 13-round DESL

B_{13}	number	PD	CD
60.78	1	027c0400 00000040	027a0400 00000040
61.37	2	027a0401 00000040	027c0400 00000040
61.37	3	027c0400 00000040	026a0400 00000040
61.37	4	027c0400 00000040	007a0400 00000040
61.37	5	027c0400 00000040	007a0401 00000040
61.37	6	027a0400 00000040	026c0400 00000040
61.37	7	027a0400 00000040	007c0401 00000040
61.37	8	027a0400 00000040	027c0401 00000040
61.37	9	007c0400 00000040	027a0400 00000040

Table 13. Results of Experiment 5

parameters		results		
Bu_{13}	number in Table 12	number of trails	sum of weights	search time
70	1	3	60.70	1141.01s
70	2	3	61.29	333.46s
70	3	3	61.29	1142.66s
70	4	3	61.29	1144.72s
70	5	3	61.29	1139.02s
70	6	3	61.29	601.44s
70	7	3	61.29	594.18s
70	8	3	61.29	602.26s
70	9	3	61.29	624.57s

¹ Set the value of PD and CD according to Table 12.

8 Conclusion and Future Work

In this paper, we improve Matsui’s search algorithm of searching the best differential and linear trails by applying three new speeding-up methods. The key idea of our speeding-up methods is to prune unsatisfiable candidates as soon as we can and to decrease the cost of linear layer operations. With the help of the improved algorithm, we find the best differential and linear trails of Feistel block cipher DESL and SPN block cipher GIFT-128 and GIFT-64. We also estimate that the clustering effect of differential trails for 13-round DES and DESL are both weak.

In the end, we would like to propose some problems deserving further investigation.

- As shown in Table 4, our improved search algorithm is not efficient enough to find the best differential trails for GIFT-128 when $n \geq 19$. It is because that when the value of $Bc_n - B_{n-1}$ is large, there would be too many candidates. We hope to find some ways to prune unsatisfiable candidates more efficiently.
- Speeding-up methods proposed in this paper are also helpful in searching related-key differential distinguishers. We hope to apply our methods to the case of related-key differential cryptanalysis.

References

1. NIST Homepage, <https://csrc.nist.gov/Projects/Lightweight-Cryptography/Round-1-Candidates>. Last accessed 10 May 2019
2. Aoki, K., Kobayashi, K., Moriai, S.: Best differential characteristic search of FEAL. In: Biham, E. (ed.) FSE 1997. LNCS, vol. 1267, pp. 41–53. Springer, Heidelberg (1997), <https://doi.org/10.1007/BFb0052333>
3. Banik, S., Pandey, S.K., Peyrin, T., Sasaki, Y., Sim, S.M., Todo, Y.: GIFT: A small present - towards reaching the limit of lightweight encryption. In: Fischer, W., Homma, N. (eds.) Cryptographic Hardware and Embedded Systems - CHES 2017 - 19th International Conference. LNCS, vol. 10529, pp. 321–345. Springer, Heidelberg (2017), https://doi.org/10.1007/978-3-319-66787-4_16

4. Bao, Z., Zhang, W., Lin, D.: Speeding up the search algorithm for the best differential and best linear trails. In: Lin, D., Yung, M., Zhou, J. (eds.) *Information Security and Cryptology - 10th International Conference, Inscrypt 2014*. LNCS, vol. 8957, pp. 259–285. Springer, Heidelberg (2014), https://doi.org/10.1007/978-3-319-16745-9_15
5. Biham, E., Shamir, A.: Differential cryptanalysis of DES-like cryptosystems. In: Menezes, A., Vanstone, S.A. (eds.) *CRYPTO 1990*. LNCS, vol. 537, pp. 2–21. Springer, Heidelberg (1990), https://doi.org/10.1007/3-540-38424-3_1
6. Biham, E., Shamir, A.: *Differential Cryptanalysis of the Data Encryption Standard*. Springer, Heidelberg (1993)
7. Daemen, J., Rijmen, V.: *The Design of Rijndael: AES - The Advanced Encryption Standard*. Information Security and Cryptography, Springer, Heidelberg (2002), <https://doi.org/10.1007/978-3-662-04722-4>
8. Knudsen, L.R., Robshaw, M.: *The Block Cipher Companion*. Information Security and Cryptography, Springer, Heidelberg (2011)
9. Leander, G., Paar, C., Poschmann, A., Schramm, K.: New lightweight DES variants. In: Biryukov, A. (ed.) *FSE 2007*. LNCS, vol. 4593, pp. 196–210. Springer, Heidelberg (2007), https://doi.org/10.1007/978-3-540-74619-5_13
10. Li, L., Wu, W., Zheng, Y., Zhang, L.: The relationship between the construction and solution of the MILP models and applications. *IACR Cryptology ePrint Archive* **2019**, 49 (2019), <http://eprint.iacr.org/2019/049>
11. Matsui, M.: Linear cryptanalysis method for DES cipher. In: Helleseht, T. (ed.) *EUROCRYPT 1993*. LNCS, vol. 765, pp. 386–397. Springer, Heidelberg (1993), https://doi.org/10.1007/3-540-48285-7_33
12. Matsui, M.: On correlation between the order of S-boxes and the strength of DES. In: Santis, A.D. (ed.) *EUROCRYPT 1994*. LNCS, vol. 950, pp. 366–375. Springer, Heidelberg (1994), <https://doi.org/10.1007/BFb0053451>
13. Mouha, N., Wang, Q., Gu, D., Preneel, B.: Differential and linear cryptanalysis using mixed-integer linear programming. In: Wu, C., Yung, M., Lin, D. (eds.) *Information Security and Cryptology - 7th International Conference, Inscrypt 2011*. LNCS, vol. 7537, pp. 57–76. Springer, Heidelberg (2011), https://doi.org/10.1007/978-3-642-34704-7_5
14. Ohta, K., Moriai, S., Aoki, K.: Improving the search algorithm for the best linear expression. In: Coppersmith, D. (ed.) *CRYPTO 1995*. LNCS, vol. 963, pp. 157–170. Springer, Heidelberg (1995), https://doi.org/10.1007/3-540-44750-4_13
15. Sun, S., Hu, L., Qiao, K., Ma, X., Shan, J., Song, L.: Improvement on the method for automatic differential analysis and its application to two lightweight block ciphers DESL and LBlock-s. In: Tanaka, K., Suga, Y. (eds.) *Advances in Information and Computer Security - 10th International Workshop on Security, IWSEC 2015*. LNCS, vol. 9241, pp. 97–111. Springer, Heidelberg (2015), https://doi.org/10.1007/978-3-319-22425-1_7
16. Sun, S., Hu, L., Song, L., Xie, Y., Wang, P.: Automatic security evaluation of block ciphers with S-bP structures against related-key differential attacks. In: Lin, D., Xu, S., Yung, M. (eds.) *Information Security and Cryptology - 9th International Conference, Inscrypt 2013*. LNCS, vol. 8567, pp. 39–51. Springer, Heidelberg (2013), https://doi.org/10.1007/978-3-319-12087-4_3
17. Sun, S., Hu, L., Wang, P., Qiao, K., Ma, X., Song, L.: Automatic security evaluation and (related-key) differential characteristic search: Application to SIMON, PRESENT, LBlock, DES(L) and other bit-oriented block ciphers. In: Sarkar, P., Iwata, T. (eds.) *ASIACRYPT 2014*. LNCS, vol. 8873, pp. 158–178. Springer, Heidelberg (2014), https://doi.org/10.1007/978-3-662-45611-8_9
18. Wu, S., Wang, M.: Security evaluation against differential cryptanalysis for block cipher structures. *IACR Cryptology ePrint Archive* **2011**, 551 (2011), <http://eprint.iacr.org/2011/551>
19. Zhou, C., Zhang, W., Ding, T., Xiang, Z.: Improving the MILP-based security evaluation algorithms against differential cryptanalysis using divide-and-conquer approach. *IACR Cryptology ePrint Archive* **2019**, 19 (2019), <https://eprint.iacr.org/2019/019>
20. Zhu, B., Dong, X., Yu, H.: MILP-based differential attack on round-reduced GIFT. In: Matsui, M. (ed.) *Topics in Cryptology - CT-RSA 2019 - The Cryptographers' Track at the RSA Conference 2019*. LNCS, vol. 11405, pp. 372–390. Springer, Heidelberg (2019), https://doi.org/10.1007/978-3-030-12612-4_19

A Examples of the Best Trails

Table 14. A best 12-round differential trail with propagation probability $2^{-58.10}$ and a best 16-round linear trail with linear correlation $2^{-32.98}$ of DESL

12-round differential trail				16-round linear trail			
r	ΔX_r	ΔY_r	w_r	r	ΓX_r	ΓY_r	w_r
1	000000000200	00000070	2.42	1	440000000011	$f000000f$	2.83
2	000358000000	00080000	4.68	2	000000004000	00000c00	2.00
3	000000000000	00000000	0.00	3	880000000012	$d000000f$	3.42
4	000358000000	00080000	4.68	4	000000000000	00000000	0.00
5	000000000200	00000060	3.00	5	880000000012	$d000000f$	3.42
6	0003f8008000	00a40500	9.61	6	000000004000	00000c00	2.00
7	0000001a2a58	00004002	11.83	7	480000000011	$f000000f$	2.83
8	0003f4008000	00a40500	9.42	8	000000000000	00000000	0.00
9	000000000200	00000060	3.00	9	480000000011	$f000000f$	2.83
10	000354000000	00080000	4.87	10	000000004000	00000c00	2.00
11	000000000000	00000000	0.00	11	880000000012	$d000000f$	3.42
12	000354000000	00480000	4.61	12	000000000000	00000000	0.00
				13	880000000012	$d000000f$	3.42
				14	000000004000	00000c00	2.00
				15	480000000011	$f000000f$	2.83
				16	000000000000	00000000	0.00

Table 15. A best 19-round differential trail with propagation probability $2^{-110.830}$ and a best 10-round linear trail with linear correlation $2^{-26.00}$ of GIFT-128

19-round differential trail			10-round linear trail		
r	ΔX_r	w_r	r	ΓX_r	w_r
1	0a000000600c0000000000000000000000	6.000	1	000000000000001600000000000000160	4.00
2	0000000010600000000000000000000000	5.000	2	00000000000000000000c000c000000000	2.00
3	00000000000000000000000000a00000	2.000	3	000000000000000000000000000001100	3.00
4	0000001000000000000000000000000000	3.000	4	00000000000000000000000000000000c	1.00
5	0000000080000000000000000000000000	2.000	5	0000000000000000000000002000000000	1.00
6	0014000000a00000000000000000000000	5.000	6	00000000000000000000020000000100	3.00
7	00000000000000004040000020200000	8.000	7	00000000000000000000080800000000	2.00
8	00005050000000000000505000000000	12.000	8	0000000000005000000000000000500	4.00
9	0000000000000000000000a000a00	4.000	9	000000000000000000000000040004	2.00
10	00000000000001100000000000000000	6.000	10	00000000000004400000022000000000	4.00
11	00080000000c00000000000000000000	4.000			
12	0000000000000002020000010000000	8.000			
13	000050400000a0200000000000000000	9.000			
14	05010000000000005050000000000000	12.000			
15	a000a000000000000000000000000000	4.000			
16	00000000000000011000000000000000	6.000			
17	00006000000000000000000000000c000	4.000			
18	00000000200000200000000000000000	4.000			
19	0020000000040000000200000400000	6.830			

Table 16. A best 14-round differential trail with propagation probability $2^{-68.00}$ and a best 13-round linear trail with linear correlation $2^{-34.00}$ of GIFT-64

14-round differential trail			13-round linear trail		
r	ΔX_r	w_r	r	ΓX_r	w_r
1	0000600000006000	4.00	1	0c0c000000000000	2.00
2	0000500000005000	6.00	2	0000100000001000	2.00
3	0000020200000000	4.00	3	0000000000000808	2.00
4	0000050000000500	6.00	4	0000000500000005	2.00
5	0202000000000000	4.00	5	0808000002020000	4.00
6	0000500000005000	6.00	6	0000505000005050	4.00
7	0000020200000000	4.00	7	00000a0a00000a0a	6.00
8	0000050000000500	6.00	8	00000000a0a00000	3.00
9	0202000000000000	4.00	9	000000000a000000	1.00
10	0000500000005000	6.00	10	0000000000000020	2.00
11	0000020200000000	4.00	11	0000000800000000	1.00
12	0000050000000500	6.00	12	0000040000000100	2.00
13	0202000000000000	4.00	13	0200000000080400	3.00
14	0000500000005000	4.00			